



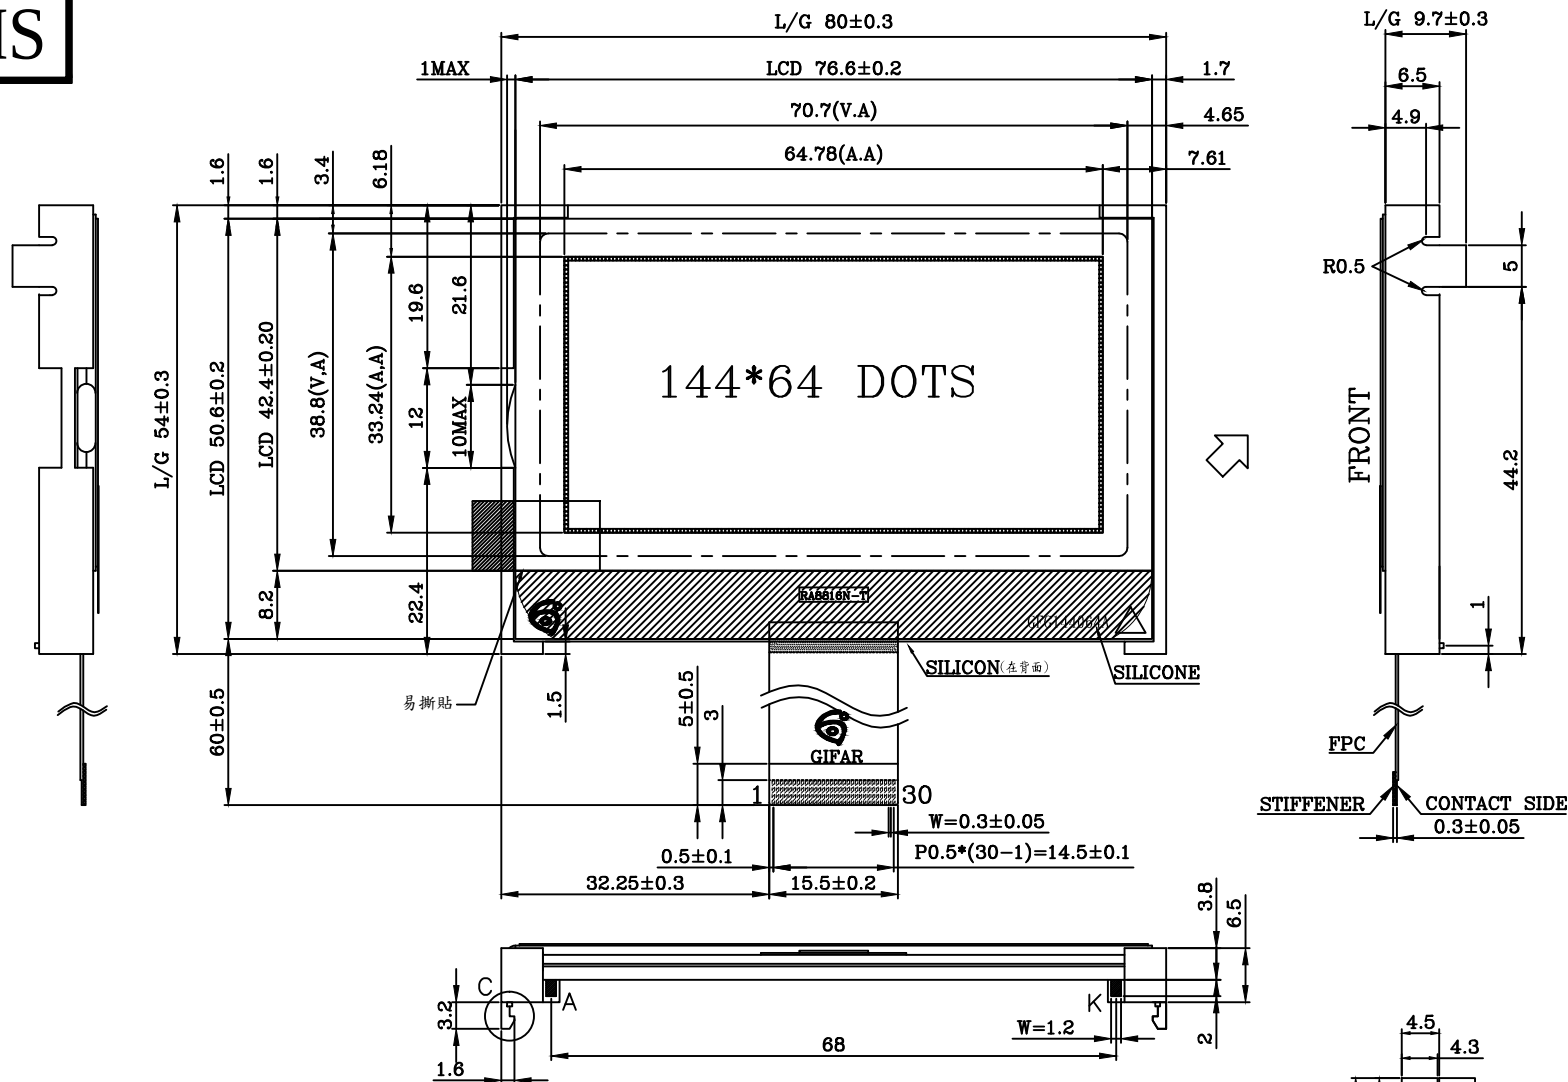

PIN FUNCTION			
PIN	NAME	PIN	NAME
1	REST	16	DB7
2	INT	17	VDD
3	P/S	18	VSS
4	C86	19	VREF
5	CS	20	V4
6	RS	21	V3
7	WR/RW	22	V2
8	RD/EN	23	V1
9	DB0	24	V0
10	DB1	25	C1P
11	DB2	26	C1M
12	DB3	27	C2P
13	DB4	28	C2M
14	DB5	29	C3P
15	DB6	30	VLCD

- NOTES:
1. DRIVE METHOD: 1/65DUTY, 1/9BIAS,VDD 3.3V, VOP10.0V.
 2. VIEW ANGLE: 6 O'CLOCK.
 3. DISPLAY TYPE: FSTN, TRANSLFLECTIVE/POSITIVE.
 4. OPERATING TEMP: -20 TO 70°C.
 5. STORAGE TEMP: -30 TO 80°C.
 6. CONNECTION:COG+FPC.(Small panel is on top layer)
 7. IC:RA8816N-T.
 8. 磨邊.
 9. BACKLIGHT:WHITE(VF=3.2V)
 10. INTERFACE: 8 BITS PARALLEL DATA INPUT FOR 8080.
 11. NOT DIMENSION TOLERANCES IS ±0.3.

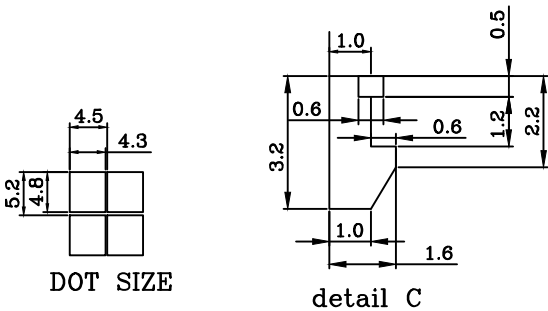

日期	版本	修改内容	晶發科技股份有限公司 GI FAR TECHNOLOGY CO., LTD				
20170425	01	修改公司抬頭為"晶發科技股份有限公司"	DATE	2017.04.25	REV	01	
			UNIT : mm	Product :	GFG144064A-FPFEB01		
			SCALE : 1/1	DRAWN:	Hazel	CHECKED:	Donlin
			SHEET : 1/1				PAGE : 1/1